


## MODEL HDI-515 V



### 60Hz STANDBY POWER RATINGS

515kW/60Hz//1800RPM

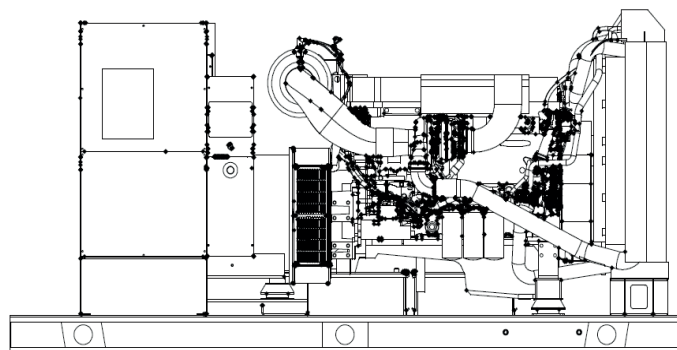

| VOLTAGE VAC | 120/240V | 120/208V | 139/240V | 277/480V | 347/600V** |
|-------------|----------|----------|----------|----------|------------|
| RATING      | Standby  | Standby  | Standby  | Standby  | Standby    |
| PHASE       | 1        | 3        | 3        | 3        | 3          |
| PF          | 1.0      | 0.8      | 0.8      | 0.8      | 0.8        |
| HZ          | 60       | 60       | 60       | 60       | 60         |
| KW          | N/A      | 515      | 515      | 515      | 515        |
| KVA         | N/A      | 644      | 644      | 644      | 644        |
| AMPS        | N/A      | 1788     | 1549     | 775      | 620        |

### Description

HIPOWER® Heavy Duty Industrial generators are an efficient, reliable and versatile source of back-up electrical power. Designed to operate in the most extreme working conditions. All HIPOWER® HD-Industrial generators combine an innovative design and the use of high quality materials that provide the user with the most dependable power that you can rely on for non-stop power with easy to operate controls.

Powered by a radiator-cooled, industrial VOLVO PENTA Diesel engine, which meets current Environmental Protection Agency (EPA) TIER 2 exhaust emission regulations, driving a single bearing, four-pole, three-phase alternator, with IP23 protection. The Emergency Power kVA rating for generator set is given with a 125 degree °C alternator winding temperature rise.

### HIPOWER® Features and Benefits

**VOLVO PENTA Diesel Engine:** Long-life, heavy-duty, 4-cycle, direct injection engine for economy of operation and maximum reliability and durability. Capable of full rated load acceptance in one step.

**Cooling:** Radiator with belt driven pusher fan.

**Air Filter:** Heavy-duty replaceable element air-cleaner.

**Alternator:** Single bearing, rotating field, self-excited, self-ventilated, 12-wire re-connectable, 60Hz brushless alternator with permanent magnetic generator (EBS), with Class F insulation. Automatic voltage regulator (AVR) providing close voltage regulation and skVA starting capability for electric motor loads.

### HIPOWER® Features and Benefits

**Enclosure:** Fully sound attenuated enclosure, fabricated using 7-gauge steel and thicker for the base, 12-gauge steel for the doors and 14-gauge for the enclosure, powder coated with finish that exceeds 1400-hr salt spray test. Ample layer of durable foam sound insulating material placed all around the inside of the container, doors and ducting with metal retaining frames. It can be cleaned with high-pressure water and is oil and fire resistant. Vertical air discharge for quiet operation. Wide steel lockable access doors with rubber seals, easy access for maintenance and service activities, lift off Die Cast Zinc hinges textured black powder coat, corrosion resistant hardware and fasteners.

**Exhaust:** Low noise, steel residential-type exhaust silencer with rain cap.

**Fuel Filtration:** Standard and secondary water separator with visible level on fuel filters

**Controls:** Digital control panel with manual and automatic start and stop features. Many programmable automatic functions for local and remote controls with LED lights, tamper proof engine hour recorder.

**Certification:** Generator set is UL 2200 Listed and CSA certified and meets ISO 8528-5. IBC seismic certified to the maximum force level requirements according to ICC-ES AC-156.

#### HIMOinsa POWER SYSTEMS, INC.

16600 South Theden Street, Olathe, KS 66062

Tel: 913 495 5557 | Fax: 913 495 5575 | [www.hipowersystems.com](http://www.hipowersystems.com)

Codes and Standards Compliances used where applicable



## APPLICATION DATA

| ENGINE SPECIFICATION                                     |                                                                   | FUEL SYSTEM                            |                                      |
|----------------------------------------------------------|-------------------------------------------------------------------|----------------------------------------|--------------------------------------|
| Manufacturer                                             | VOLVO PENTA                                                       | Recommended fuel                       | # 2 - ULSD                           |
| Model                                                    | TAD1641GE-B                                                       | Fuel supply line, min. ID mm(in.)      | -                                    |
| EPA certified                                            | Tier 2                                                            | Fuel return line,min. ID, mm (in.)     | -                                    |
| Crankshaft speed                                         | 1,800 rpm                                                         | Max. lift, fuel pump, type, m (ft)     | TBD                                  |
| Type                                                     | Diesel, 4-stroke                                                  | Fuel filter                            | Secondary 5 Microns @ 98% Efficiency |
| Injection                                                | Direct                                                            | LUBRICATION SYSTEM                     |                                      |
| Aspiration                                               | Turbocharged                                                      | Oil pan capacity - gal (L)             | 11.1 (42)                            |
| Number of Cylinders                                      | 6                                                                 | Oil pan capacity with filter - gal (L) | 12.7 (48)                            |
| Cylinder arrangement                                     | In-line                                                           | Oil cooler                             | Liquid                               |
| Displacement CID (liters)                                | 983.9 (16.12)                                                     | Recommended lubricating oil grade      | SAE 10W-30 (refer to owners manual)  |
| Bore and Stroke ins (mm)                                 | 5.67 x 6.50 (144 x 165)                                           | Oil consumption at full load           | < 0.1% of fuel consumption           |
| Nominal power                                            | 768 hp                                                            | Oil pressure – psi (kPA)               | 94 (650)                             |
| Cooling                                                  | Liquid                                                            | ENGINE ELECTRICAL SYSTEM               |                                      |
| Governor                                                 | Electronic Volvo/EMS 2.4                                          | Starting motor voltage                 | 24 volt                              |
| Governor Regulation Class                                | ISO 8528 Part 1 Class G3                                          | Cold Cranking Amps - minimum           | 280 Amp                              |
| Frequency Regulation                                     | Isochronous                                                       | Battery charging Alternator            | 80 Amp                               |
| Starting motor & alternator                              | 24 Volt                                                           | Battery capacity                       | 1400CCA 1720CA 430RC GROUP SIZE 8D   |
| Compression ratio                                        | 170:1                                                             |                                        |                                      |
| Air cleaner type                                         | Heavy duty - single cartridge                                     |                                        |                                      |
| ALTERNATOR SPECIFICATION                                 |                                                                   |                                        |                                      |
| Manufacturer                                             | STAMFORD                                                          |                                        |                                      |
| Model 120/208V Three phase                               | HCI534E                                                           |                                        |                                      |
| Model 277/480V Three phase                               | HCI534D                                                           |                                        |                                      |
| Model 347/600V Three phase                               | HCI534D                                                           |                                        |                                      |
| Alternator Type                                          | Four pole, rotating field                                         |                                        |                                      |
| Excitation System                                        | Brushless. PMG-excited                                            |                                        |                                      |
| Power factor                                             | 0.8                                                               |                                        |                                      |
| Number of leads                                          | 12 leads, reconnectable                                           |                                        |                                      |
| Stator Pitch                                             | 2/3                                                               |                                        |                                      |
| Insulation                                               | Class H                                                           |                                        |                                      |
| Windings – Temperature Rise                              | Class H (125/40° C)                                               |                                        |                                      |
| Enclosure (IEC-34-S)                                     | IP23                                                              |                                        |                                      |
| Bearing                                                  | Single, sealed                                                    |                                        |                                      |
| Coupling                                                 | Flexible disc                                                     |                                        |                                      |
| Amortisseur windings                                     | Full                                                              |                                        |                                      |
| Voltage regulation – no load to full load with MX341 AVR | ± 1%                                                              |                                        |                                      |
| TIF                                                      | <50                                                               |                                        |                                      |
| Radio Frequency Emissions compliance                     | Meets requirements of most industrial and commercial applications |                                        |                                      |
| Line harmonics                                           | 5% maximum                                                        |                                        |                                      |

### HIMOinsa POWER SYSTEMS, INC.

16600 South Theden Street, Olathe, KS 66062

Tel: 913 495 5557 | Fax: 913 495 5575 | [www.hipowersystems.com](http://www.hipowersystems.com)

Codes and Standards Compliances used where applicable



## STANDARD FEATURES


| Enclosure (If selected)                               | Engine System                 | Fuel System                                              |
|-------------------------------------------------------|-------------------------------|----------------------------------------------------------|
| Rust-Proof Fastener with Nylon Washers Protect Finish | Oil Drain Extension           | Primary Fuel Filter                                      |
| High Performance Sound-Absorbing Material (L1)        | Air Cleaner                   | Flexible fuel lines                                      |
| Gasketed Doors                                        | Fan Guard                     | <b>Generator set</b>                                     |
| Air Discharge Hoods for Radiators-Upwards Pointing    | Factory Filled Oil            | 2 Year/2000 hours Limited Warranty                       |
| Lift Off Door Hinges                                  | Battery Charging Alternator   | Separation of Circuits – Multiple Breakers (load center) |
| Stainless Steel Lockable Handles                      | <b>Alternator Systems</b>     | Separation of Circuits – High / Low Voltage              |
| Textured Polyester Powder Coat                        | 12 Leads (3-Phase, Non 600V)  | Internal Genset Vibration Isolation                      |
| <b>Cooling System</b>                                 | Class H Insulation Material   | Wrapped Exhaust Piping                                   |
| Factory-Installed Radiator                            | Vented Rotor                  | Standard Factory Testing                                 |
| Radiator Drain Extension                              | 2/3 Pitch                     | Emergency Stop                                           |
| 50/50 Ethylene Glycol Antifreeze                      | Full Load Capacity Alternator | Silencer Mounted in the Discharged Hood (Enclosed Only)  |
| <b>Electrical Systems</b>                             | Protective Thermal Switch     |                                                          |
| Battery Cables and Battery Tray                       | Permanent Magnet Excitation   |                                                          |
| Batteries                                             | Skewed Stator                 |                                                          |
|                                                       | PMG with MX341                |                                                          |

## CONTROL SYSTEM



- Charge alternator failure alarm
- 4-Line back-lit LCD text display
- Front panel editing with PIN protection
- Customisable status screens
- Power save mode
- 11 configurable inputs
- 8 configurable outputs
- Flexible sensor inputs
- Configurable timers and alarms
- 3 configurable maintenance alarms
- Multiple date and time scheduler
- Configurable event log (250)

- “Protections disabled” feature
- kW protection
- Reverse power (kW) protection
- LED and LCD alarm indication
- Power monitoring (kWh, kVAR, kVAh, kVArh)
- Load switching (load shedding and dummy load outputs)
- Independent Earth Fault trip
- Fuel usage monitor and low fuel alarms
- Configurable display languages
- User selectable simultaneous RS232, RS485 & Ethernet communications
- MODBUS RTU & TCP support
- Configurable MODBUS pages
- Fully configurable via DSE Configuration Suite PC software
- Data logging to assist with fault finding
- PLC editor allows user configurable functions to meet specific application requirements
- License-free PC software
- Multiple date and time scheduler
- DSENet<sup>®</sup> expansion compatible

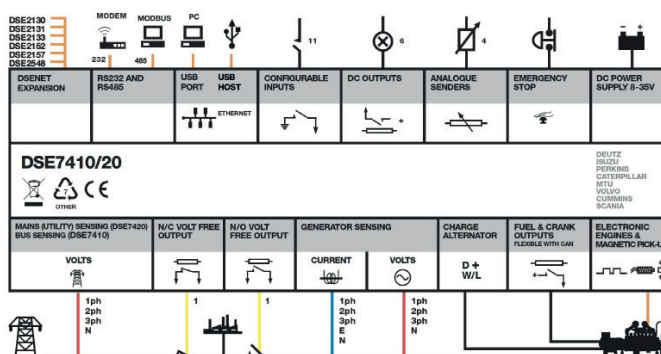

## CONFIGURABLE OPTIONS

| ENCLOSURE                | ENGINE SYSTEM                                        | ELECTRICAL SYSTEM                                |
|--------------------------|------------------------------------------------------|--------------------------------------------------|
| Open Skid                | Oil heater                                           | Battery Warmer                                   |
| Weather Enclosure        | 120V-1ph Water Jacket Heater (with Isolation Valves) | 10A Battery Charger                              |
| Level 1 Sound attenuated | 208V-3ph Water Jacket Heater (with Isolation Valves) | 5A Battery Charger                               |
| Level 2 Sound attenuated | <b>CIRCUIT BREAKER OPTIONS</b>                       | 10 Positions Load Center (100Amps)               |
| <b>ALTERNATOR SYSTEM</b> | Thermal-Magnetic trip 80% and 100% rated             | Remote ESTOP with N3R break glass                |
| Tropical coating         | LSI Electronic trip 80% and 100% rated               | 120V GFCI receptacle                             |
| Anti-condensation heater | LSI Electronic trip 80% and 100% rated               | 10A Relay common alarm                           |
| Alternator upsizing      | LSIG Electronic trip 80% and 100% rated              | 10A Run Relay                                    |
| Rheostat                 | Shunt trip                                           | 8 LED Remote Annunciator on Surface mounted Box  |
| MX321 AVR                | Auxiliary Contacts for Main and Secondary Breaker    | 16 LED Remote Annunciator on Surface mounted Box |
|                          | Second Main Line Circuit Breaker                     | 24 LED Remote Annunciator on Surface mounted Box |
|                          | Mechanical Lugs                                      | Parallel controller with motorized breaker       |
|                          |                                                      | <b>GENERATOR SET</b>                             |
|                          |                                                      | Extended Factory Load Testing                    |
|                          |                                                      | Extended Warranty                                |
|                          |                                                      | Seismic Mounts                                   |

## ENGINEERED OPTIONS

| ENCLOSURE                                  | ENGINE SYSTEM                                                      | ELECTRICAL SYSTEM                       |
|--------------------------------------------|--------------------------------------------------------------------|-----------------------------------------|
| Snow Hood (only with L2)                   | Fluid Containment Pan                                              | AC/DC Enclosure Lighting Kit with Timer |
| Air Outlet Gravity dampers                 |                                                                    | Enclosure Heater                        |
| Air Inlet motorized dampers (only with L2) |                                                                    | 240V Twist lock receptacle              |
| <b>CIRCUIT BREAKER OPTIONS</b>             | <b>CONTROL SYSTEM</b>                                              | <b>GENERATOR SET</b>                    |
| 3rd Breaker system                         | Spare inputs (x4) / output (x4)                                    | Special Testing                         |
| Shunt Trip on 3rd Breaker                  | DSE8610 - Parallel controller with motorized CB                    |                                         |
| Auxiliary contact on 3rd Breaker           | DSE2130 - DSENet Input Expansion Module                            |                                         |
| <b>FUEL TANK</b>                           | DSE2157 - DSENet Output Expansion Module                           |                                         |
| Custom Size – 72hr and 96hr                | DSE855 - DSENet USB to Ethernet ModBus TCP/IP Communication Module |                                         |
| Custom type to meet State spec.            | DSE892 - DSENet USB to Ethernet ModBus TCP/IP - SNMP Comm. Module  |                                         |
| Vent Extensions                            | DSE2520 - Remote Display Module                                    |                                         |
| Overfill Protection Valve                  |                                                                    |                                         |

### HIMOinsa POWER SYSTEMS, INC.

16600 South Theden Street, Olathe, KS 66062

Tel: 913 495 5557 | Fax: 913 495 5575 | [www.hipowersystems.com](http://www.hipowersystems.com)

Codes and Standards Compliances used where applicable



## OPERATING DATA

| FUEL SYSTEM                         |                                      |
|-------------------------------------|--------------------------------------|
| Recommended fuel                    | # 2 - ULSD                           |
| Fuel supply line, min. ID mm (in.)  | -                                    |
| Fuel return line, min. ID, mm (in.) | -                                    |
| Max. lift, fuel pump, type, m (ft)  | TBD                                  |
| Fuel filter                         | Secondary 5 Microns @ 98% Efficiency |

| FUEL CONSUMPTION |                  | (Standby Power Rating) |
|------------------|------------------|------------------------|
| 100% load        | US gal/hr (L/hr) | 35.8 (135.5)           |
| 75% load         | US gal/hr (L/hr) | 26.8 (101.4)           |
| 50% load         | US gal/hr (L/hr) | 17 (64.3)              |
| 25% load         | US gal/hr (L/hr) | 8.5 (32.1)             |

| COOLING SYSTEM                                        |                                |
|-------------------------------------------------------|--------------------------------|
| Engine cooling air flow                               | cfm (m³/min) 23,095 (654)      |
| Alternator cooling flow                               | cfm (m³/min) 2,780 (78.7)      |
| Combustion air flow                                   | cfm (m³/min) 1,617 (45.8)      |
| Total cooling air flow (engine+alternator+combustion) | cfm (m³/min) 27,492 (778.5)    |
| Total cooling capacity                                | US gallons (liters) 15.85 (60) |
| Max. Operating Temperature                            | °F (°C) 122 (50)               |

| EXHAUST                                |                           |
|----------------------------------------|---------------------------|
| Exhaust gas flow                       | cfm (m³/min) 3899 (110.4) |
| Max. Exhaust temp at full load degrees | °F (°C) 876 (469)         |
| Max. permissible back pressure         | in H2O (kPa) 40.1 (10)    |

## Starting Capabilities (sKVA)

|            | 480V |     |      |      |      | 208/240V |     |      |      |      | 600V |     |     |      |      |
|------------|------|-----|------|------|------|----------|-----|------|------|------|------|-----|-----|------|------|
| Alternator | 10%  | 15% | 20%  | 25%  | 30%  | 10%      | 15% | 20%  | 25%  | 30%  | 10%  | 15% | 20% | 25%  | 30%  |
| Standard   | 450  | 725 | 1025 | 1370 | 1750 | 400      | 650 | 930  | 1250 | 1600 | 400  | 620 | 880 | 1180 | 1520 |
| Upsized    | 550  | 850 | 1200 | 1620 | 2070 | 450      | 730 | 1050 | 1370 | 1760 | 440  | 680 | 960 | 1300 | 1680 |

## Circuit Breaker

|                | 277/480V     | 120/208V            | 120/240V            | 347/600V     |
|----------------|--------------|---------------------|---------------------|--------------|
| Make and model | ABB T6N800TW | ABB T8VBCFC0000000X | ABB T8VBCFC0000000X | ABB T6N800TW |
| Amps           | 800A         | 2000 A              | 1600 A              | 800 A        |

### HIMOinsa POWER SYSTEMS, INC.




16600 South Theden Street, Olathe, KS 66062

Tel: 913 495 5557 | Fax: 913 495 5575 | [www.hipowersystems.com](http://www.hipowersystems.com)




Codes and Standards Compliances used where applicable






## DIMENSIONS, WEIGHTS & SOUND LEVELS

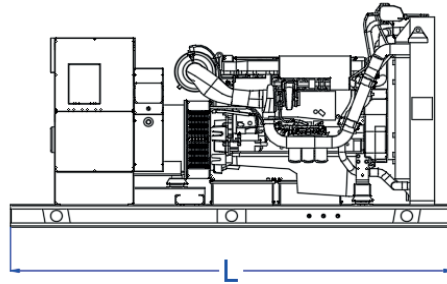

| CONFIGURATION | RUN TIME (HOURS) | USABLE CAPACITY (Gal.) | L = Length | W = Width | H = Height | Weight lbs | dBA |
|---------------|------------------|------------------------|------------|-----------|------------|------------|-----|
| OPEN SET      | No Tank          | -                      | 154"       | 68.5"     | 81.2"      | 8,000      | N/A |
|               | 28               | 1016                   | 231"       | 68.5"     | 24"        | 4,000      |     |
|               | 55               | 2000                   | 280"       | 68.5"     | 36"        | 5,600      |     |

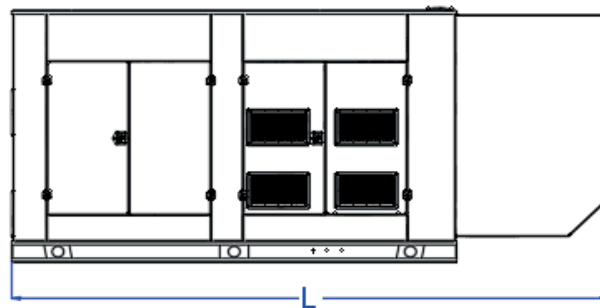

| CONFIGURATION     | RUN TIME (HOURS) | USABLE CAPACITY (Gal.) | L = Length | W = Width | H = Height | Weight lbs | dBA |
|-------------------|------------------|------------------------|------------|-----------|------------|------------|-----|
| WEATHER ENCLOSURE | No Tank          | -                      | 207"       | 68.5"     | 93.1"      | 9,300      | 83  |
|                   | 28               | 1016                   | 231"       | 68.5"     | 24"        | 4,000      |     |
|                   | 55               | 2000                   | 280"       | 68.5"     | 36"        | 6,300      |     |
| LEVEL 1 ENCLOSURE | No Tank          | -                      | 207"       | 68.5"     | 93.1"      | 9,300      | 78  |
|                   | 28               | 1016                   | 231"       | 68.5"     | 24"        | 4,000      |     |
|                   | 55               | 2000                   | 280"       | 68.5"     | 36"        | 6,300      |     |

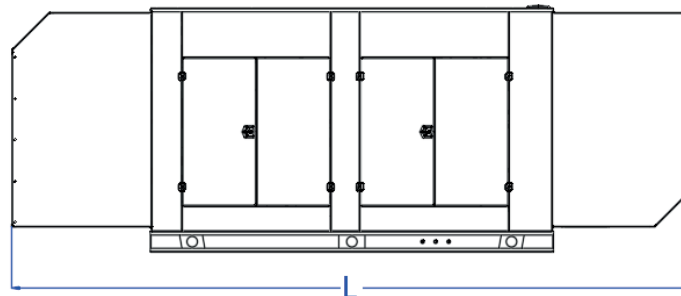

| CONFIGURATION     | RUN TIME (HOURS) | USABLE CAPACITY (Gal.) | L = Length | W = Width | H = Height | Weight lbs | dBA |
|-------------------|------------------|------------------------|------------|-----------|------------|------------|-----|
| LEVEL 2 ENCLOSURE | No Tank          | -                      | 260"       | 68.5"     | 93.1"      | 9,700      | 76  |
|                   | 28               | 1016                   | 284"       | 68.5"     | 24"        | 3,400      |     |
|                   | 55               | 2000                   | 284"       | 68.5"     | 36"        | 6,300      |     |

\* All measurements are approximate and for estimation purposes only. Weights are without fuel tank. Sound levels measured at 23ft (7m) and does not account for ambient site conditions.



Conforms to UL STD 2200  
Certified to CSA STD C22.2#100  
Certified to CSA STD C22.2#14

REV-04

**HIMOINSA POWER SYSTEMS, INC.**

16600 South Theden Street, Olathe, KS 66062

Tel: 913 495 5557 | Fax: 913 495 5575 | [www.hipowersystems.com](http://www.hipowersystems.com)

Codes and Standards Compliances used where applicable

