

WINCO[®] GENERATORS

W6010KE-04/A
W6010KE-17/A
W6010KE-18/A
5,000 RUNNING WATTS

 **An American Company.**
We produce our products in our 200,000ft² facility located in Le Center, Minnesota, equipped with modern engineering, fabrication and assembly capabilities.



THREE-PHASE

We've added another portable with 3-PH capabilities.



TÜV & EPA CERTIFIED

We take the time to engineer our products to have the certification you need.




7 Gallon Fuel Tank


The EPA approved steel fuel tank design eliminates hydrocarbon emissions.

Receptacle Panels

208V & 240V

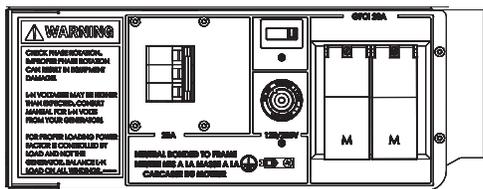


480V

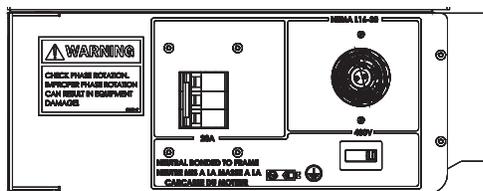


Rugged Steel Design.



Kohler Industrial Diesel Engine.

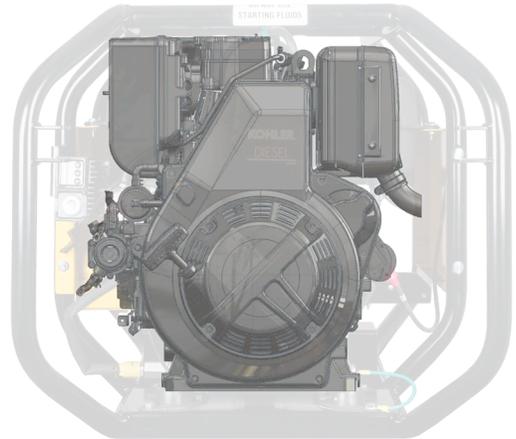

Industrial Genend with clean power

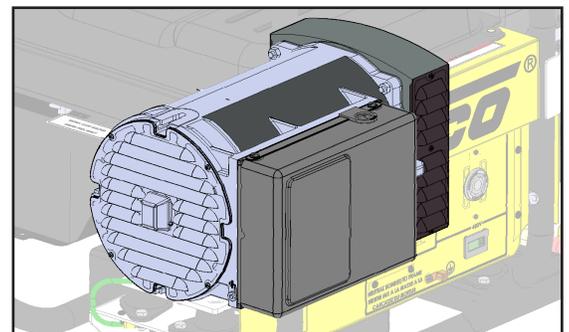

SPECIFICATIONS

ENGINE

ENGINE BRAND	KOHLER
ENGINE MODEL	KD440
ENGINE STARTER	ELECTRIC
ENGINE SPEED	3600 RPM
ENGINE CYLINDERS	SINGLE
DISPLACEMENT/TYPE	440 CC / OHV
FREQUENCY REGULATION ⁽¹⁾	+/-1.5%
LOW OIL PROTECTION	STANDARD
RECOMMENDED OIL ⁽²⁾	5W-40
OIL CAPACITY	1.3 QT
FUEL TANK	7 GAL
FUEL GAUGE	YES
FULL LOAD RUN TIME ⁽³⁾	14 HOURS
FUEL CONSUMPTION	GAL/HR
100%	0.50
75%	0.39
50%	0.30
0%	0.18
BATTERY SIZE ⁽⁴⁾	BCI GROUP U1 300CCA

NOTES: (1) Steady state frequency regulation. (2) The recommended oil is for normal applications. See operator's manual for the recommended oil for your needs. (3) Run time is estimated. (4) Battery not included.

OPTIONAL ACCESSORIES

TWO-WHEEL DOLLY KIT	WITH FLAT-FREE TIRES
GENERATOR COVER	34.75" x 25" x 24.50"
BATTERY	BCI GROUP U1 300 CCA

SHIPPING

SHIPPING DIMENSIONS (L x W x H)	35" x 25" x 31"
SHIP WEIGHT	268 LBS
FREIGHT CLASS	70

ELECTRICAL


VOLTAGE	PF	STARTING WATTS	RUNNING WATTS	AMPS
120/208V	0.8	6,000	5,000	17.3
129/230V	0.8	6,000	5,000	15.7
277/480	0.8	6,000	5,000	7.5
VOLTAGE REGULATION			AVR +/- 1%	
BONDED NEUTRAL			YES	
BRUSHED			YES	
MAIN CIRCUIT BREAKER			20 AMP	
120 VOLT RECEPTACLES ⁽¹⁾ (2) NEMA 5-20 20A DUPLEX (GFCI)				
FULL POWER RECEPTACLES		30 AMP PLUG INCLUDED		
208 - 240V		(1) NEMA L21-30R 30A		
480V		(1) NEMA L16-30R 30A		

NOTES: (1) Only available on the 208V and 240V models.

GENSET

MOTOR STARTING (CODE G)	0.75 HP
DBA @ 7 METERS	87.6
TOTAL HARMONIC DISTORTION	< 5%
LIFTING EYE ⁽¹⁾	STANDARD
2-WHEEL DOLLY KIT	OPTIONAL
INSULATION	CLASS H
PROTECTIVE ROLL FRAME	1.25" DIA. 14 GA. STEEL
ASSEMBLED IN	USA
EPA APPROVED	YES
CARB APPROVED	YES
TÜV CERTIFICATION	CSA
UNIT WARRANTY ⁽²⁾	3 YEARS COMMERCIAL

NOTES: (1) Lifting eye shipped loose. (2) For more generator warranty, see operator's manual.

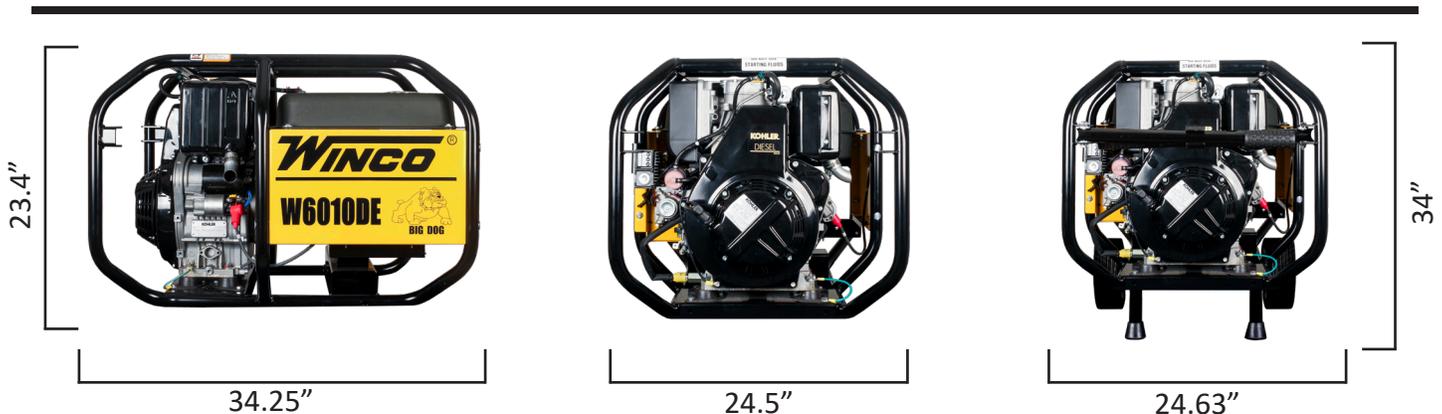

Specifications are subject to change without notice.

